


Mayplas

The Insulation Converter

543 Polythene Enclosed Rockwool Roll

Product Guide

Mayplas 543 Polythene Enclosed Rockwool Roll is designed for use in thermal & acoustic applications where loose fibres could cause problems, particularly above suspended ceilings in high tech or sensitive areas

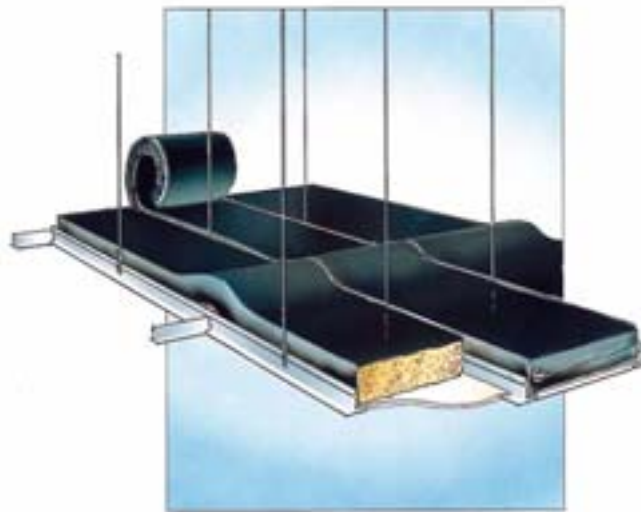

- * **80mm - 180mm thicknesses**
- * **Vapour Check to BS 2972:1989**
- * **Thermal insulation above ceilings**
- * **Ideal for high tech areas in buildings**



FM 11012

Peel Industrial Estate - Chamberhall St - Bury - Lancashire BL9 0LU

Tel: 0161-447-8320 Fax: 0161-447-8333 E-mail: sales@mayplas.co.uk

Mayplas

Product Specification **543 Polythene Enclosed Rockwool Roll**

The product consists of Rockwool Cladding Roll
fully enclosed in 250 gauge black polythene

Roll Dimensions:

80mm x 1000mm x 5.00m (5.00 m²)
100mm x 1000mm x 4.80m (4.80 m²)
120mm x 1000mm x 4.00m (4.00 m²)

80mm x 2/500mm x 5.00m (5.00 m²)
100mm x 2/500mm x 4.80m (4.80 m²)
120mm x 2/500mm x 4.00m (4.00 m²)
150mm x 2/500mm x 3.20m (3.20 m²)
160mm x 2/500mm x 3.00m (3.00 m²)
180mm x 2/500mm x 2.70m (2.70 m²)

Black Polythene:

250 gauge
Vapour Check to BS 2972:1989

Thermal Resistance (R value):

80mm: 2.00 m²K/W
100mm: 2.50 m²K/W
120mm: 3.00 m²K/W
150mm: 3.75 m²K/W
160mm: 4.00 m²K/W
180mm: 4.50 m²K/W

**Rockwool Reaction to Fire
Classification:**

A1 as defined in BS EN 13501-1

Fixing

Fixing detail is dependent upon the intended application
Please phone our Sales Office for specific application advice



FM 11012

Peel Industrial Estate - Chamberhall St - Bury - Lancashire BL9 0LU

06/05

Tel: 0161-447-8320 Fax: 0161-447-8333 E-mail: sales@mayplas.co.uk