


# Mayplas

*The Insulation Converter*

## 554 Firestop Strip


### Product Guide

**550 Series Firestop Systems have been developed to provide up to 4 hours firestopping at the junctions of compartment walls and floors**  
**The systems have been tested in accordance with BS 476: Part 20:1987**

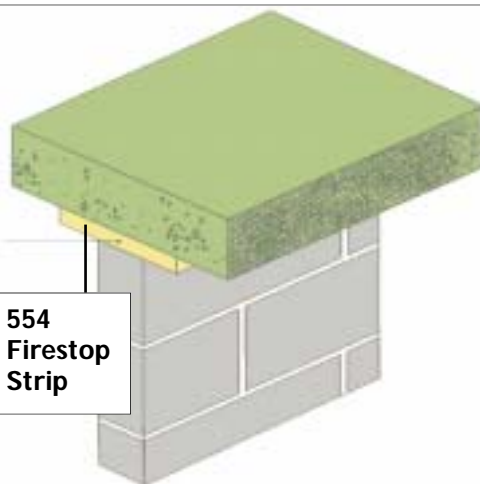

#### Ordering Information Required

- 1) wall width
- 2) actual void size
- 5) total linear metres for job

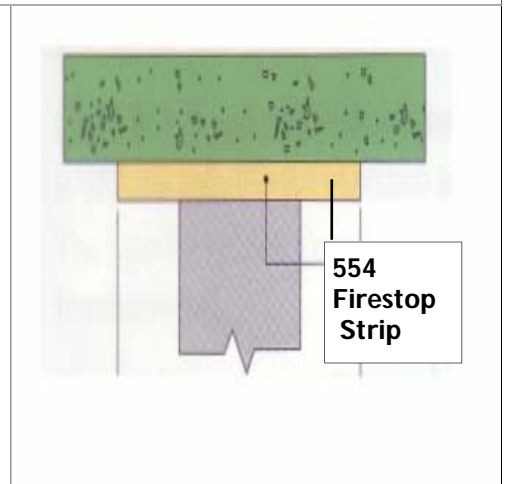

**554 Firestop Strip** is a no compression, tight fitting (extended width) strip for rectangular voids

It is used in cases where the fire resistance of a deck horizontally is less than the fire resistance of the wall itself

**Maximum Void Size to be filled = 50% of wall width**

**available for voids of between 10mm and 100mm**

(Mayplas will cut the strip exactly to the stated void size to allow for a no compression, tight fit )

**all x 1200mm lengths**

#### **Wall / Firestop Width**

100mm wall width = 200mm Firestop = 2 hrs fire resistance

150mm wall width = 300mm Firestop = 3 hrs fire resistance

200mm wall width = 400mm Firestop = 4 hrs fire resistance

Installation must provide for a tight and accurate fit, with no compression

Lengths of 554 Firestop Strip may be joined along the wall by careful and tight butt jointing

Installers may find a small plastic or metal 'slip plate' useful when fitting 554 Firestop Strip between rough masonry surfaces

**Equivalent to Rockwool Conlit Firestop 3A**



FM 11012

Peel Industrial Estate - Chamberhall St - Bury - Lancashire BL9 0LU

Tel: 0161-447-8320 Fax: 0161-447-8333 E-mail: sales@mayplas.co.uk