


Mayplas

The Insulation Converter

644 BCO Foil Faced Rockfibre Ductslab

Product Guide

Mayplas BCO Foil Faced Rockfibre Ductslab is designed for the thermal & acoustic insulation of air conditioning and warm air ductwork

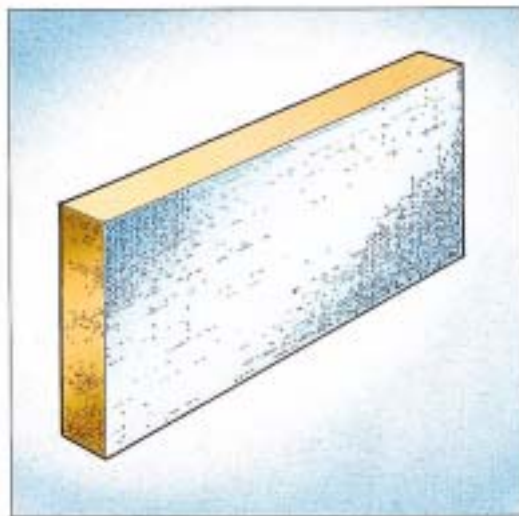

- * Class O Fire Performance
- * For Rectangular Ductwork
- * 33 kgs/m³ - 100 kgs/m³ densities



FM 11012

Peel Industrial Estate - Chamberhall St - Bury - Lancashire BL9 0LU

Tel: 0161-447-8320 Fax: 0161-447-8333 E-mail: sales@mayplas.co.uk

Mayplas

Product Specification

644 BCO Foil Faced Rockfibre Ductslab

The product consists of BCO Foil Faced Rockfibre Slab.
It is supplied in thicknesses and densities as detailed below

Densities:	33, 45, 60 & 100 kgs/m³
Thermal Conductivity:	33 kgs/m³: 0.037 W/mk 45 kgs/m³: 0.035 W/mk 60 & 100 kgs/m³: 0.034 W/mk
Thickness:	25, 30, 40, 50, 60, 75, 100mm
Slab Size:	1200mm x 600mm
Fire Performance:	non combustible to BS 476: Part 4: 1970 (1984)
Maximum Operating Temp:	230 deg C
<u>BCO Foil Facing</u>	Aluminium foil / glassfibre scrim / polyethylene laminate
Moisture Vapour Resistance:	1710 MNs/g
Fire Performance:	Class 1 Surface Spread of Flame to BS 476: Part 7: 1997 Class O to The Building Regulations 1991
<u>Fixing</u>	
According to ductwork manufacturer's design specifications	



FM 11012

Peel Industrial Estate - Chamberhall St - Bury - Lancashire BL9 0LU

06/03

Tel: 0161-447-8320 Fax: 0161-447-8333 E-mail: sales@mayplas.co.uk