

Mayplas


The Insulation Converter

622 Black Glass Tissue Faced Glassfibre Roll

Product Guide

**Mayplas Black Tissue Faced Glassfibre Roll
is designed for general acoustic insulation applications**

**The Black Tissue Facing helps prevent migration
of surface fibres whilst maintaining acoustic integrity**

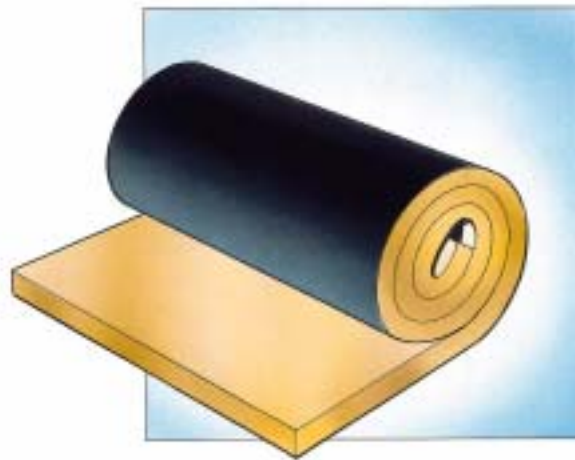

- * Non combustible
- * Black Glass Cloth Facing
- * 20 kgs/m³ density Glassfibre
- * Excellent insulation performance



FM 11012

Peel Industrial Estate - Chamberhall St - Bury - Lancashire BL9 OLU

Tel: 0161-447-8320 Fax: 0161-447-8333 E-mail: sales@mayplas.co.uk

Mayplas

Product Specification 622 Black Glass Tissue Faced Glassfibre Roll

The product consists of 10.5 kgs/m³ or 20 kgs/m³ density glassfibre roll faced on one side with Black Glass Tissue

<u>Roll Dimensions:</u>	25mm x 1200mm x 25.00m (30.00m ²) 40mm x 1200mm x 16.00m (19.20 m ²) 50mm x 1200mm x 13.00m (15.60 m ²) 60mm x 1200mm x 15.00m (18.00 m ²) 80mm x 1200mm x 11.25m (15.60 m ²) 100mm x 1200mm x 9.17m (11.00 m ²) 150mm x 1200mm x 6.03m (6.99 m ²) 200mm x 1200mm x 3.88m (4.50 m ²)
<u>Nominal Density:</u>	25mm - 50mm: 20.0 kgs/m ³ 60mm - 200mm: 10.5 kgs/m ³
<u>Thermal Conductivity:</u>	25mm - 50mm: 0.035 W/m deg C 60mm - 200mm: 0.044 W/m deg C
<u>Fire Rating of Base Fibre:</u>	Non combustible to BS 476: Part 4 1970 (1984)
<u>Black Glass Tissue Facing:</u>	70 grams/m ² weight Non combustible to DIN 4102

Fixing

Fixing detail is dependent upon the intended application

Please phone our Sales Office for specific application advice



FM 11012

Peel Industrial Estate - Chamberhall St - Bury - Lancashire BL9 OLU

06/03

Tel: 0161-447-8320 Fax: 0161-447-8333 E-mail: sales@mayplas.co.uk